

GE
Lighting

GE energy smart®

LED

PAR30 Short and Long Neck Lamps

GE offers dimmable 10 Watt LED PAR30 lamps that bring energy efficient and long life options to traditional downlight applications.



Application illustration only, subject lamps not used in photo.

Outstanding energy efficiency

Compared to standard 45 watt Incandescent R30 reflectors, GE's dimmable LED PAR30 uses only 10 watts, reducing energy consumption by 78%. Although the lamps produce approximately 30% fewer lumens, the lamps optics concentrate light on the target, diminishing wasted extraneous light.

Long life

30,000 hours rated life at (L70).
25,000 hours rated life at (L70) for dimmable version.

Environmentally conscious

Energy efficiency and long life means fewer lamp replacements vs. standard incandescent and halogen light sources. These lamps are energy efficient, contain no lead or mercury and are RoHS compliant.

Halogen-like color

Available in 2700K and 3000K.

GE Quality and Reliability

3 year limited warranty.



Short Neck



Long Neck

When you Think LED lighting, Think GE.

ecomaginationSM



GE energy smart® LED PAR30 Short and Long Neck Lamps

Performance Data

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Case Qty.	MOL (in.)	Lumens Initial	CBCP	Initial Color Temp.	CRI	+Rated Life (yrs) 3 hrs/day	Rated Life (hrs)	Estimated Energy Cost /yr	Energy# Star® Status	Additional Information
Compact PAR30 - Dimming - High Output																
PAR30	MED	12	65135	LED12DP30S830/20	120	6	3.75	750	5100	3000	84	22.8	25,000	\$1.45	★	Accent, 20° beam, Silver
			65136	LED12DP30S830/35	120	6	3.75	750	2050	3000	84	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
			65137	LED12DP30S827/20	120	6	3.75	740	5000	2700	83	22.8	25,000	\$1.45	★	Accent, 20° beam, Silver
			65138	LED12DP30S827/35	120	6	3.75	740	2000	2700	83	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
			65133	LED12DP30S/FL/TP	120	3	3.75	740	2000	2700	83	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
			65985	LED12DP30S827/25	120	6	3.75	740	3200	2700	83	22.8	25,000	\$1.45	★	Accent, 25° beam, Silver
			65986	LED12DP30W827/25	120	6	3.75	740	3200	2700	83	22.8	25,000	\$1.45	★	Accent, 25° beam, White
			65987	LED12DP30B827/25	120	6	3.75	740	3200	2700	83	22.8	25,000	\$1.45	★	Accent, 25° beam, Black
			67256	LED12DP30S840/20	120	6	3.75	840	5800	4000	85	22.8	25,000	\$1.45	★	Accent, 20° beam, Silver
			67257	LED12DP30S840/35	120	6	3.75	840	2600	4000	85	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
Compact PAR30 - Dimming																
PAR30	MED	10	61922	LED10DP30S830/20	120	6	3.75	500	3720	3000	80	22.8	25,000	\$1.20	★	Accent, 20° beam, Silver
			61923	LED10DP30S827/20	120	6	3.75	450	3450	2700	80	22.8	25,000	\$1.20	★	Accent, 20° beam, Silver
			64326	LED10DP30W827/20	120	6	3.75	450	3450	2700	80	22.8	25,000	\$1.20	★	Accent, 20° beam, White
			63026	LED10DP3/FL/TP	120	3	3.75	450	1240	2700	80	22.8	25,000	\$1.20	★	Accent, 35° beam, Silver
Compact PAR30 Long Neck - Dimming - High Output																
PAR30	MED	12	65139	LED12DP3LS830/20	120	6	4.75	750	5100	3000	84	22.8	25,000	\$1.45	★	Accent, 20° beam, Silver
			65140	LED12DP3LS830/35	120	6	4.75	750	2050	3000	84	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
			65141	LED12DP3LS827/20	120	6	4.75	740	5000	2700	83	22.8	25,000	\$1.45	★	Accent, 20° beam, Silver
			65142	LED12DP3LS827/35	120	6	4.75	740	2000	2700	83	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
			65134	LED12DP3LS/FL/TP	120	3	3.75	740	2000	2700	83	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
Compact PAR30 Long Neck - Dimming																
PAR30L	MED	10	61924	LED10DP3LS830/20	120	6	4.75	500	3720	3000	80	22.8	25,000	\$1.20	★	Accent, 20° beam, Silver
			61925	LED10DP3LS827/20	120	6	4.75	450	3450	2700	80	22.8	25,000	\$1.20	★	Accent, 20° beam, Silver
			63027	LED10DP3L/FL/TP	120	3	4.75	450	1240	2700	80	22.8	25,000	\$1.20	★	Accent, 35° beam, Silver
Compact PAR30 - Non-Dimming																
PAR30	MED	10	75376	LED10P30/NFL/TP	120	3	3.75	340	1400	3000	82	27.4	30,000	\$1.20		Accent, 24° beam, Silver
			75613	LED10P30S830/24	120	6	3.75	340	1400	3000	82	27.4	30,000	\$1.20		Accent, 24° beam, Silver
			76144	LED10P30S827/24	120	6	3.75	320	1300	2700	82	27.4	30,000	\$1.20		Accent, 24° beam, Silver
Compact PAR30 Long Neck - Non-Dimming																
PAR30L	MED	10	75377	LED10P3L/NFL/TP	120	3	4.75	340	1400	3000	82	27.4	30,000	\$1.20		Accent, 24° beam, Silver
			75614	LED10P3LS830/24	120	6	4.75	340	1400	3000	82	27.4	30,000	\$1.20		Accent, 24° beam, Silver
			76145	LED10P3LS827/24	120	6	4.75	320	1300	2700	82	27.4	30,000	\$1.20		Accent, 24° beam, Silver
Retail Display (High CRI - Low Glare) Compact PAR30 - Long Neck - Non-Dimming																
PAR30L	MED	12	66050	LED12P3LS930/25	120	6	4.75	660	3000	3000	92	22.8	25,000	\$1.45	★	Narrow Flood, 25° beam, Silver
			66051	LED12P3LS930/40	120	6	4.75	660	1100	3000	92	22.8	25,000	\$1.45	★	Flood, 40° beam, Silver
			66052	LED12P3LS927/25	120	6	4.75	630	3000	2700	92	22.8	25,000	\$1.45	★	Narrow Flood, 25° beam, Silver
			66053	LED12P3LS927/40	120	6	4.75	630	1100	2700	92	22.8	25,000	\$1.45	★	Flood, 40° beam, Silver







* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen rating (L70)

** Minimum order quantity = 6

★ ENERGY STAR® status: Certified as meeting ENERGY STAR® guidelines.

^ Estimated energy cost per year based on \$0.11 per kWh energy rate and 3 operating hours per day

Notes: 1) Product descriptions ending in "/TP" indicate a carded blister or clamshell package nested in a tray for shelf display. Cards also designed for hook display.

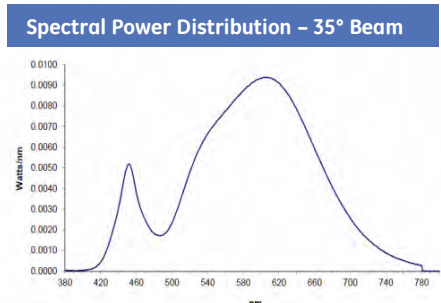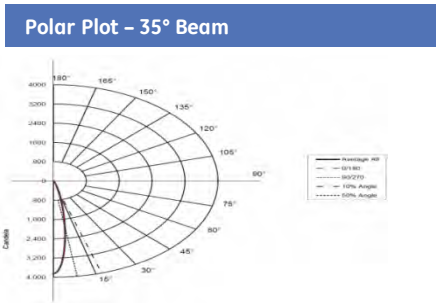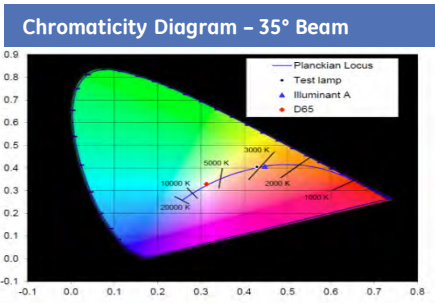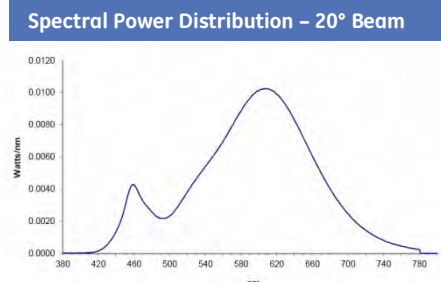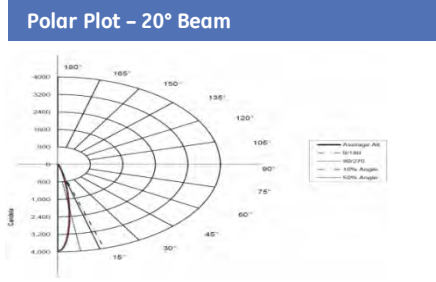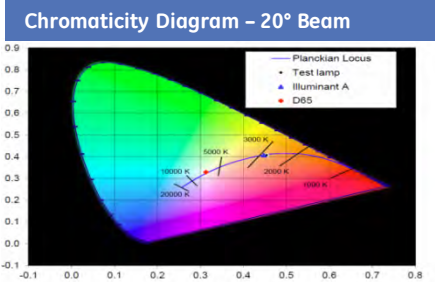

Specifier Statement

Lamps shall be an E26 medium screw-in base with integral transformer. The life rating of this product shall be 25,000 for dimmable and 30,000 for non-dimmable, which are the hours of operation these lamps will provide before reaching 70% of their original light output of 750 lumens for the high output dimmable, 500 lumens for dimmable and 340 lumens for non-dimmable. Actual lamp life before failure may be significantly longer.

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.

For additional product and application information, please consult GE's Website: www.gelighting.com/ThinkLED



For more in-depth knowledge, snap the QR code and link to more detailed LED Lighting Information

