



LED LAMPS

ProLED® **PL Bypass Series**

5 YR
WARRANTY
5-Year Warranty

CLASSIFIED
UL US
UL Classified


Energy Saver


50,000 Hour Life

ProLED Bypass Plug-In lamps are long-lasting energy efficient lamps that perform without ballasts



No External Ballast Required

Dedicated Horizontal and Vertical Orientation Versions (Horizontal Features Rotatable Socket Alignment)

Lasts 5 times Longer Than CFL

Replaces 26W, 32W, and 42W CFL

Backed By a 5-Year Warranty

Applications:

Office
Hospitality
Medical
Retail

Markets:

Commercial
Retail

Halco®
LIGHTING TECHNOLOGIES

Contact Your Customer Care Specialist
For Pricing, Orders And Technical Support.

800.677.3334 **www.halcolighting.com**


ProLED[®]

PL Bypass Series


Product #: _____ Type: _____
 Project: _____ Date: _____
 Comments: _____ Initials: _____

Specifications

- Requires simple re-wiring to bypass ballast and maximize efficiency
- 50,000 hour life resulting in lower maintenance costs over time
- Vertical and horizontal lamps available
- Horizontal socket rotates for proper orientation in luminaire
- Mercury-free for safer operation and disposal
- RoHS Compliant
- Fits G24q, GX24q, G24d, and GX24d Sockets (26, 32, and 42W CFL)
- Instant-On
- UL rated for damp locations
- Rated for ICAT fixtures

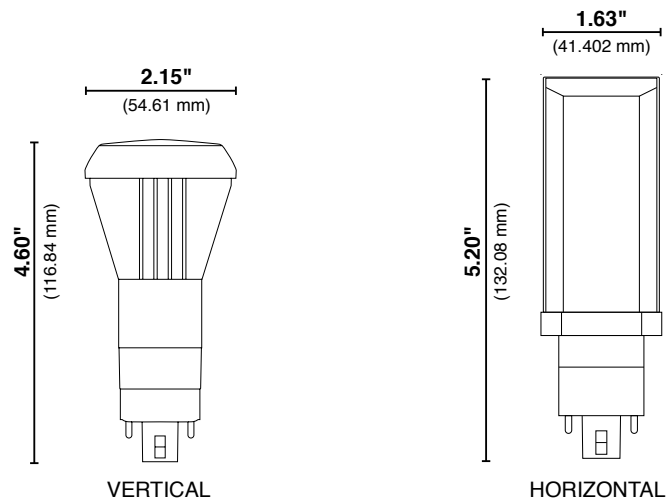

Savings Comparison

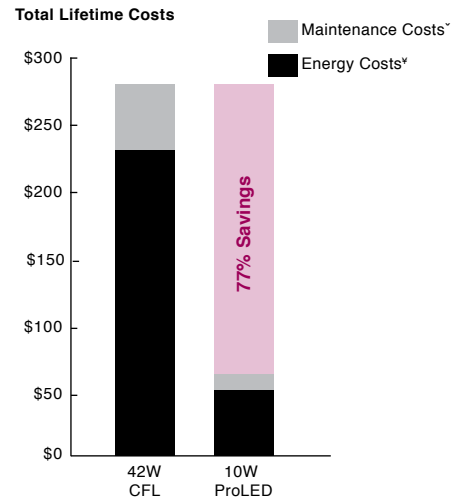

* Maintenance costs based on 15 minutes at \$40 per/hr
 * Energy costs based on \$0.11 kWh

Ordering Information



	Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Pkg. Qty.	MOL	Equivalent Wattage
Vertical												
⊗	10	G24q/GX24q/G24d/GX24d	81141	PL10V/835/BYP/LED	120-277	3500K	82	1000	50,000	1/10	4.6"	26/32/42
⊗	10	G24q/GX24q/G24d/GX24d	81142	PL10V/841/BYP/LED	120-277	4100K	82	1000	50,000	1/10	4.6"	26/32/42
⊗	10	G24q/GX24q/G24d/GX24d	81143	PL10V/850/BYP/LED	120-277	5000K	82	1000	50,000	1/10	4.6"	26/32/42
Horizontal												
⊗	10	G24q/GX24q/G24d/GX24d	81144	PL10H/835/BYP/LED	120-277	3500K	82	1000	50,000	1/10	5.2"	26/32/42
⊗	10	G24q/GX24q/G24d/GX24d	81145	PL10H/841/BYP/LED	120-277	4100K	82	1000	50,000	1/10	5.2"	26/32/42
⊗	10	G24q/GX24q/G24d/GX24d	81146	PL10H/850/BYP/LED	120-277	5000K	82	1000	50,000	1/10	5.2"	26/32/42

⊗ NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase. Must be operated with an ambient fixture temperature between -4°F(-20°C) and 113°F(45°C).