



## SORAA BRILLIANT HL™

The Soraa Brilliant HL single-source COB lamp combines Soraa's world-class optics design and driver technology with a photopically efficacious LED

## SORAA POINT SOURCE OPTICS™

With a point source and sophisticated folded optics, Soraa creates a very controlled beam angle at 10 degrees, even in challenging form factors resulting in smooth uniform beams and crisp shadows

## FLICKER

Soraa lamps demonstrate low levels of flicker in both dimmed and undimmed states

## ENERGY EFFICIENCY AND LONG LIFE

85% more energy efficient than standard halogen lamps

Typical payback of one year or less

Rated lifetime to L70: 35,000hrs

Warranty: 3yrs or 25,000hrs whichever comes first

Warranty information: [soraa.com/resources/legal](http://soraa.com/resources/legal)

## CERTIFICATIONS

Title 20 certification **pending\***, RoHS, CE, UL/CUL, FCC Title 47 Part 15B



**RoHS**



## HIGHLY COMPATIBLE

Thermally and geometrically compatible with standard fixtures and suitable for damp locations

Works with trailing edge and leading edge phase cut dimmers (see [www.soraa.com/resources](http://www.soraa.com/resources))

## INTENDED USE AND APPLICATIONS

Intended for use in PAR20 compatible recessed downlights, track lighting and other indoor and outdoor applications

Soraa lamps are designed to safely turn down in any thermal environment not conducive to minimum airflow or proper ventilation

## GENERAL SPECIFICATIONS

### Form Factor

Width: 64mm (2.52")

Height: 77mm (3.04")

Weight: 160g

### Operating Temperature

Minimum: -40°C (ambient)

Typical: 70°C - 80°C (base)

Maximum: 90°C (base)

### Electrical

Wattage: 10.8W

Power factor: 0.92

Voltage: 120V +/- 12V

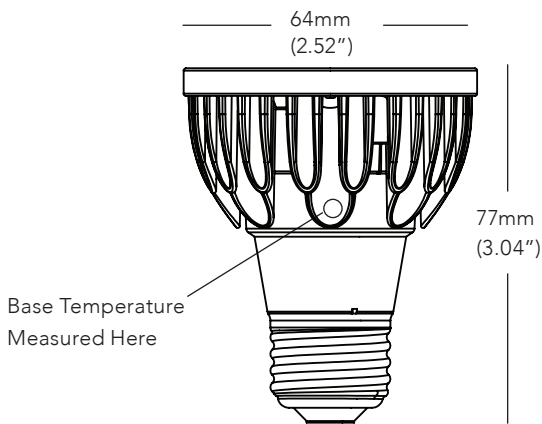
Frequency: 50/60Hz

### Dimming


Dimmable to <20%

\* Soraa Brilliant HL (PAR20, 8.5W, 10D, 2700K) lamp does not meet Title 20 compliance required for California

DIMENSIONS



10 DEGREE BEAM

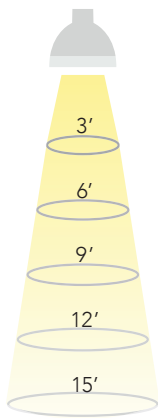





Beam Dia at 50% CBCP (ft)	Field Dia at 10% CBCP (ft)	Foot-candles (% of CBCP)
0.5	1.1	11.1%
1.0	2.1	2.8%
1.6	3.2	1.2%
2.1	4.2	0.7%
2.6	5.3	0.4%

Note: Footcandles may be calculated by multiplying the CBCP of the desired model number by the percentage in the tables above

SPECIFICATIONS BY MODEL NUMBER\* SORAA LED PAR20 8.5W

Model #	Product Code	CCT (K)	Beam Angle	Field Angle	CBCP (Cd)	Halogen Equiv	Total Flux (Lm)	Efficacy (Lm/W)	CRI	McA	Title 20
BRILLIANT HL SERIES											
SP20-8-10D-827-H1	08793	2700	10	20	11020	90	700	83	92	3	–
SP20-8-10D-830-H1	08801	3000	10	20	11500	90	730	87	92	3	pending

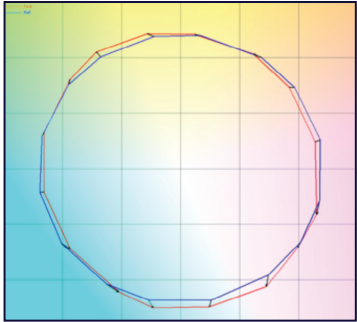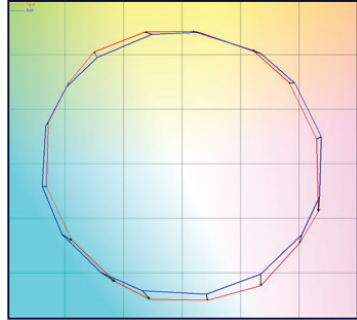CCT: Correlated Color Temperature    **McA**: White Point Accuracy in McA step    **SNAP**: SORAA SNAP System Compatible  
\* Specifications are at stable warm operating conditions (25°C ambient)  
– Soraa Brilliant HL (PAR20, 8.5W, 10D, 2700K) lamp does not meet Title 20 compliance required for California

SERIES/CCT	COLOR ACCURACY	SPECTRAL POWER DISTRIBUTION
BRILLIANT HL 2700K	 <p>Rf: 90, Rg: 98, Rfh1: 85</p>	 <p>Wavelength (nm)</p> <p>CRI: 92, R9: 50</p>
BRILLIANT HL 3000K	 <p>Rf: 90, Rg: 98, Rfh1: 85</p>	 <p>Wavelength (nm)</p> <p>CRI: 92, R9: 50</p>

Rf: TM-30 metric measuring color fidelity (whether colors are similar to those under natural light). Rf is a more accurate version of the CRI Ra. Rf is 100 for natural light.  
Rg: TM-30 metric measuring color gamut (whether colors are more saturated than under natural light). Rg is 100 for natural light.  
Rfh1: TM-30 metric measuring color fidelity for red tones. Rfh1 is a more accurate version of the CRI R9. Rfh1 is 100 for natural light.