

GE
Lighting

GE energy smart®

LED

High Output PAR30 Short and Long Neck Lamps

GE offers dimmable 12 LED High Output PAR30 lamps that bring energy efficient and long life options to downlight applications.

Outstanding energy efficiency

Using 12 watts of energy, save over \$104 in energy cost over the rated life of the lamp vs. a standard 50 watt halogen PAR30 based on \$.11/kWh.

Long life

25,000 hour life rating (L70).

Environmentally conscious

Energy efficiency and long life means fewer lamp replacements vs. standard incandescent and halogen light sources. These lamps are energy efficient, contain no lead or mercury and are RoHS compliant.

Excellent Color

CRI = up to 84.

More Light

Up to 50% more light than a standard GE PAR30 LED.

Beam Patterns

20° and 35° beam patterns; spot versions to follow.

GE Quality and Reliability

3 year limited warranty.

When you Think LED lighting, Think GE.

ecomaginationSM



imagination at work



Application Illustration only, subject lamps not used in photo.



Short Neck



Long Neck









GE energy smart® LED High Output PAR30 Lamps

Performance Data

Bulb Shape	Base Type	Watts	Order Code	Description	Case Volts	MOL Qty.	Lumens (in.)	Initial Lumens	CBCP	Initial Color Temp.	CRI	+Rated Life (yrs) 3 hrs/day	Rated Life (hrs)	Estimated Energy Cost /yr	Energy# Star® Status	Additional Information
Compact PAR30 - Dimming - High Output																
PAR30	MED	12	65135	LED12DP30S830/20	120	6	3.75	750	5100	3000	84	22.8	25,000	\$1.45	★	Accent, 20° beam, Silver
			65136	LED12DP30S830/35	120	6	3.75	750	2050	3000	84	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
			65137	LED12DP30S827/20	120	6	3.75	740	5000	2700	83	22.8	25,000	\$1.45	★	Accent, 20° beam, Silver
			65138	LED12DP30S827/35	120	6	3.75	740	2000	2700	83	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
			65133	LED12DP30S/FL/TP	120	3	3.75	740	2000	2700	83	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
			65985	LED12DP30S827/25	120	6	3.75	740	3200	2700	83	22.8	25,000	\$1.45	★	Accent, 25° beam, Silver
			65986	LED12DP30W827/25	120	6	3.75	740	3200	2700	83	22.8	25,000	\$1.45	★	Accent, 25° beam, White
			65987	LED12DP30B827/25	120	6	3.75	740	3200	2700	83	22.8	25,000	\$1.45	★	Accent, 25° beam, Black
			67256	LED12DP30S840/20	120	6	3.75	840	5800	4000	85	22.8	25,000	\$1.45	★	Accent, 20° beam, Silver
			67257	LED12DP30S840/35	120	6	3.75	840	2600	4000	85	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
Compact PAR30 Long Neck - Dimming - High Output																
PAR30	MED	12	65139	LED12DP3LS830/20	120	6	4.75	750	5100	3000	84	22.8	25,000	\$1.45	★	Accent, 20° beam, Silver
			65140	LED12DP3LS830/35	120	6	4.75	750	2050	3000	84	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver
			65141	LED12DP3LS827/20	120	6	4.75	740	5000	2700	83	22.8	25,000	\$1.45	★	Accent, 20° beam, Silver
			65142	LED12DP3LS827/35	120	6	4.75	740	2000	2700	83	22.8	25,000	\$1.45	★	Accent, 35° beam, Silver

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen rating (L70)
 ** Minimum order quantity = 6
 ★ ENERGY STAR® status: Certified as meeting ENERGY STAR® guidelines.
 ^ Estimated energy cost per year based on \$0.11 per kWh energy rate and 3 operating hours per day
 Notes: 1) Product descriptions ending in "/TP" indicate a corded blister or clamshell package nested in a tray for shelf display. Cards also designed for hook display.

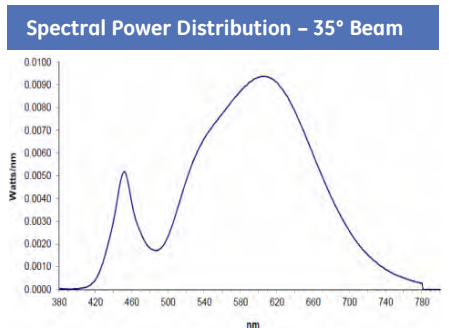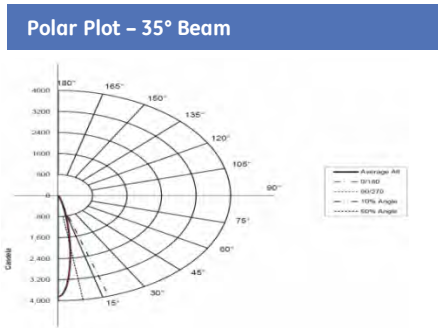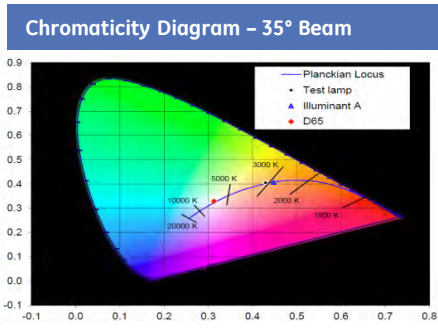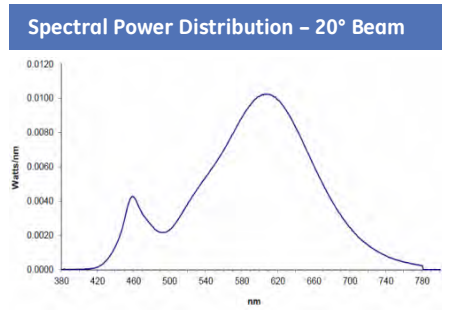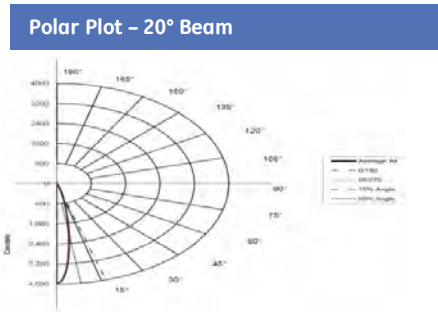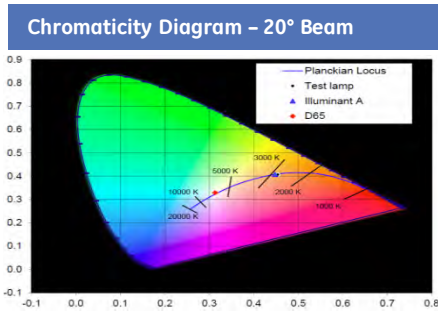

Specifier Statement

Lamps shall be an E26 medium screw-in base with integral transformer. The life rating of this product shall be 25,000 for dimmable and 30,000 for non-dimmable, which are the hours of operation these lamps will provide before reaching 70% of their original light output of 750 lumens for the high output dimmable, 500 lumens for dimmable and 340 lumens for non-dimmable. Actual lamp life before failure may be significantly longer.

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.

For additional product and application information, please consult GE's Website: www.gelighting.com/ThinkLED



For more in-depth knowledge, snap the QR code and link to more detailed LED Lighting Information

